


Office Lighting

FNSB-K

IP20



FNSB-K series designed in the form of square to be driven into the ceiling allows soft lighting applications and the LED technology used ensures energy-saving substantially. Ensures practical solutions thanks to its compliance with different types of suspended ceilings as well as different power ranges.

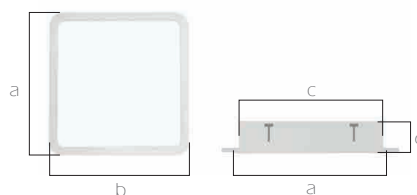

Code	a	b	c	d	Cut-Out
FNSB-K 20	200 mm	200 mm	169 mm	82 mm	175X175 mm
FNSB-K 40	400 mm	400 mm	369 mm	82 mm	375X375 mm

Code	FNSB-K 20	FNSB-K 40
LED	High efficient Mid-Power LED	
System Power	10W - 20W	20W - 30W
Light Flux	960 lm - 1,790 lm	1,990 lm - 2,680 lm
Colour Temperature	3000 - 4000 - 5000 K	
Voltage	220V - 50Hz	
Body	0.6 mm thick DKP sheet steel	
Reflector	0.3 mm thick aluminum	
Diffuser	Opal	
Cooler	Cooling from the body surface	
Frame	1.5 mm thick DKP sheet steel	
Colour	White	
Box Dimensions	22x22x10 cm	42x42x10 cm
Weight	2.000 gr	3.000 gr